



Safety Anti-Slip Paint

Safety Anti-Slip Paint provides a textured coating to almost any slick surface. Ideal for floors, stairs, ladders, ramps, tool handles, railings, running boards and almost any surface exposed to moisture.

Quality epoxy resin formula stands up in tough industrial applications.

- For interior/external use
- Tack free in one hour
- Resistant to oil and gas
- Adheres to wood, fiberglass, cement and most metals
- Convenient aerosol application



Eliminates dangerous, slick surfaces in just one coat

CRC Part #	Container Size	Color	Units per Case
18024	16 oz aerosol	Clear	6
18025	16 oz aerosol	Yellow	6
18026	16 oz aerosol	Black	6
18027	16 oz aerosol	White	6

TURN OVER FOR MORE PRODUCT INFORMATION

Made in USA 




Your Best Solution™

Customer Care: 800-272-4620
 Technical Information: 800-521-3168
www.crcindustries.com



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.

©2017 CRC Industries, Inc. 10442-SS


CRC Safety Anti-Slip Paint

Directions

- Surface must be dry, clean and free of rust before painting. Protect surrounding areas from spray mist. For best results, use when temperature is between 50° and 90°F (10° and 32°C).
- Shake can at least one minute after rattle is heard and occasionally during use.
- Spray with steady strokes at a distance of 6 to 10 inches (15 to 25 cm). Several light coats give a better finish than one heavy coat. Tack free in 60 minutes and fully cured in 24 hours.
- If clogging develops, turn sprayhead 1/4 turn and spray or remove and clean sprayhead. DO NOT use a pin or place anything into the can opening. With can and sprayhead pointed away, re-insert sprayhead with a gentle twisting motion.
- To clear sprayhead for future use, turn can upside down and spray for 3 seconds. Please recycle empty cans. Dispose of partially used cans responsibly according to local regulations. DO NOT incinerate or compact.

Application

- For indoor/outdoor use on most surfaces: railings, stairs, ladders, tool handles, boat decks, truck beds, running boards, ramps etc. Use as a finish coat and recoat every 2-4 months based on traffic wear. Resistant to oil, gas and most chemicals.

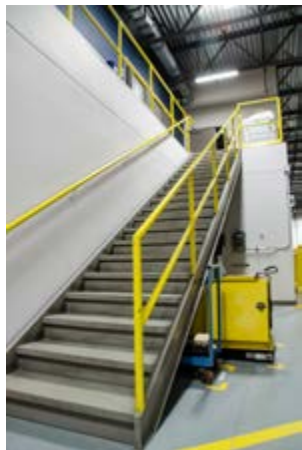

Made in USA 



Your Best Solution™

Customer Care: 800-272-4620
Technical Information: 800-521-3168
www.crcindustries.com



CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.
©2017 CRC Industries, Inc.