

CRC Wire Pulling Lubricant

with **TEFLON**® maintains superior lubricity throughout the entire pull. This unique, water-based formulation is designed for use with all types of cables and conduits. When dry, it leaves a light coating containing **TEFLON** that will substantially ease cable removal should that ever become necessary. Applies quickly - cleans easily.

Directions: Apply directly to wire or cable by hand or brush. Can also be used to pre-lubricate conduit. Washes off with water.

Warning: Contains: Water 7732-18-5, Methanol 67-56-1 and Isopropanol 67-63-0. Do not take internally. If product comes in contact with eyes or mouth, flush with water. Wash hands thoroughly after handling. Keep container closed. **First Aid:** In case of eye contact, flush with water for 15 minutes. If swallowed, drink large amounts of water. For severe overexposure, call a physician. For spills: Use proper protective equipment. Take precaution as necessary to prevent contamination of ground or surface water.

Disposal: Unused contents and containers must be disposed of in accordance with all federal, state and local regulations. **EMPTY** containers may be offered to a qualified reconditioner. Unused contents may be offered to a licensed reclaimer. **DO NOT DUMP INTO SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER.** For additional information consult the Material Safety Data Sheet for this product.

KEEP AWAY FROM CHILDREN

TEFLON is a registered trademark of DuPont.

Wire Pulling Compound



LISTED
21C6

CRC Industries, Inc.

©1998 CRC Industries, Inc.

Warminster, PA 18974


1-800-521-3168 (Technical Information)

Made in USA

98A

1-800-272-4620 (Customer Service)

CRC #561D

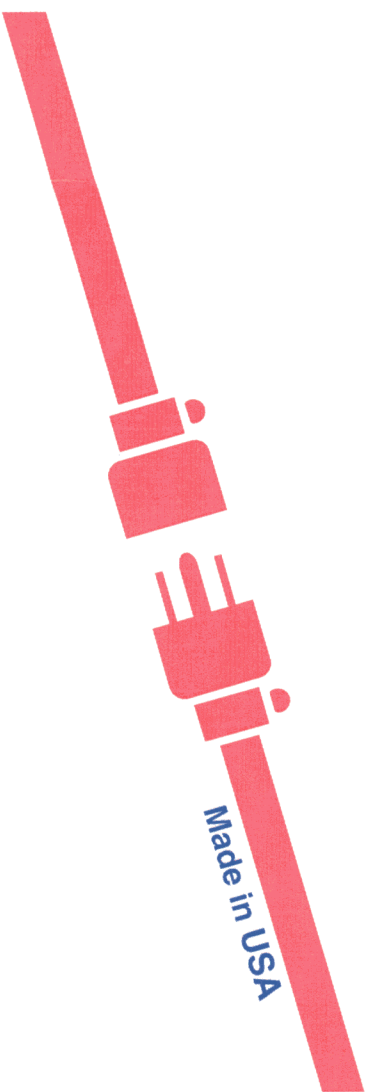

Wire Pulling Lubricant

WITH
TEFLON®

- Non-staining • Water Clean-up
- Wide Temperature Range (23°F to 210°F)
- Safe for all cable types including Telecommunication and Fiber Optic



Part No. 02098

Net Contents: 1 qt. / 32 fl. oz. (946 mL)

Read warnings on back panel.

