

Clean-R-Carb™

NAPA/CRC Clean-R-Carb™ dissolves carburetor deposits such as gum, sludge and varnish to improve fuel system performance and insure maximum fuel economy. Safe for use with Oxygen Sensors and Catalytic Converters.

DIRECTIONS: *Read entire label before using this product.* This product is extremely flammable and may cause flash fires and engine backfires which may result in injury. Do not spray on hot metal surfaces or when engine is hot. Use plastic extension tube to direct spray to exact location.

CARBURETOR AND LINKAGE: With ignition off and engine cool, remove air filter cleaner and spray entire exterior surface of carburetor including linkage. After carburetor dries, start engine and spray CLEAN-R-CARB™ down the carburetor throat to remove the deposits from the lower throttle plate area.

AUTOMATIC CHOKES: With engine off, spray CLEAN-R-CARB™ on both ends of choke valve and corresponding linkages while opening and closing choke by hand.

MANIFOLD HEAT CONTROL VALVE: With engine cold, spray CLEAN-R-CARB™ on both ends of heat control valve shaft. Move counterweight up and down until valve moves freely. If necessary, tap gently with a light hammer to loosen a frozen heat control valve.

PCV VALVE: Disconnect crank case side of PCV valve and with engine running spray CLEAN-R-CARB™ into open end of valve while working the plunger back and forth.

IMPORTANT: If spilled or sprayed on painted surface, wipe off or wash off immediately.

DANGER: POISON ⚠ Cannot be made non-poisonous. Contains Acetone 67-64-1, Toluene 108-88-3, Methanol 67-56-1, and Carbon dioxide 124-38-9. Do not puncture, incinerate or store can above 120°F. Exposure to high temperature may cause can to burst. Do not place in direct sunlight or near any heat source. Contents are extremely flammable. Do not use near open flame or other sources of ignition. Avoid continuous breathing of vapor and spray mist. Avoid contact with skin and eyes. Overexposure to liquid or vapors can cause moderate to severe eye and skin irritation, irritation to upper respiratory tract, and central nervous system effects such as headache, dizziness, drowsiness or confusion. High concentrations have caused liver and kidney damage in laboratory animals. Product may pose an aspiration hazard if swallowed. Deliberate misuse by concentrating and inhaling the contents can be harmful or fatal. Use with adequate ventilation. Open doors and windows or use other means to ensure a fresh air supply during use and while product is drying. Vapors are heavier than air and can accumulate in low areas. If you experience any symptoms listed on this label, increase ventilation or leave the area.

SPECIAL USAGE WARNINGS: Contents Extremely Flammable. Do not smoke while spraying. Extinguish all flames, pilot lights, and heaters. Do not use on energized equipment. Vapors will accumulate readily and may ignite. Use only with adequate ventilation; maintain ventilation during use and until vapors are gone.

FIRST AID: In case of eye or skin contact, flush with water for 15 minutes. If swallowed, DO NOT induce vomiting. If too much is breathed, remove to fresh air. For severe overexposure, call a physician immediately. For additional information, consult the Material Safety Data Sheet for this product.

DISPOSAL: All used and unused product should be disposed of in conformance with local, state and federal regulations. Do NOT dump in sewers, floor drains, on the ground or into any body of water.

KEEP AWAY FROM CHILDREN

ELECTRICAL SHOCK HAZARD: This can will conduct electricity. Keep away from all live electrical sources including Battery Terminals, Solenoids, Electrical Panels and other electronic components. Failure to observe this warning may result in serious injury from flash fire and/or electrical shock.

Not for use in California. See MSDS for additional OTC/LADCO state sales restrictions.


Manufactured for: NAPA
Corporate Office: Atlanta, GA 30339
©2010 CRC Industries, Inc.
Warminster, PA 18974
www.crcindustries.com

Ball DOT 2Q M5702

800-521-3168 (Technical Information)
800-272-8963 (Customer Service)
215-442-6260 (MSDS)
Made in U.S.A. 10A CRC#581F/G



Clean-R-Carb™ Carburetor Cleaner

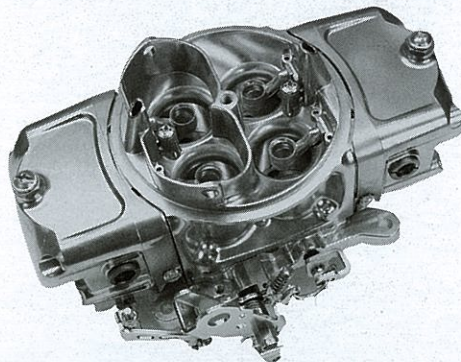

MAXIMIZE PERFORMANCE



- Cleans Deposits
- Restores Maximum Power
- Eliminates Hesitation

DANGER: EXTREMELY FLAMMABLE.
HARMFUL OR FATAL IF SWALLOWED.
MAY CAUSE BLINDNESS IF SWALLOWED.
VAPOR HARMFUL. EYE AND SKIN IRRITANT.
CONTENTS UNDER PRESSURE.
READ WARNINGS ON BACK PANEL.

Net Wt. 1 lb. (454 g) No. 091343