

# Air Intake Cleaner

CARQUEST Air Intake Cleaner improves starting, idling and running. Safe for oxygen sensors and catalytic converters. For use on fuel injected gasoline engines. Cleans gum and varnish from throttle valves and throttle body. Safe for use on TEFLON®-coated throttle bodies.

## DIRECTIONS: Please read entire label before using this product.

1. Run engine to normal operating temperature.
2. Turn off engine.
3. For personal safety, do not apply while equipment is energized.
4. Disconnect air-intake boot at engine.
5. Place towel or rag under butterfly throttle to collect residue.
6. Spray liberally into throat while moving the butterfly valve back and forth.
7. Replace air-intake boot.
8. Drive immediately.
9. Use every 3000 miles.


If accidentally sprayed on painted or plastic surfaces, wash off immediately.

**WARNING:** Contains Acetone 67-64-1, Heptane isomers 142-82-5, Toluene 108-88-3, Diacetone alcohol 123-42-2, and Carbon dioxide 124-38-9. Do not puncture, incinerate or store can above 120°F. Exposure to high temperature may cause can to burst. Do not place in direct sunlight or near any heat source. Contents are extremely flammable. Do not use near open flame or other sources of ignition. Avoid continuous breathing of vapor and spray mist. Avoid contact with skin and eyes. Overexposure to liquid or vapors can cause moderate to severe eye and skin irritation, irritation to upper respiratory tract, and central nervous system effects such as headache, dizziness, drowsiness or confusion. Deliberate misuse by concentrating and inhaling the contents can be harmful or fatal. Use with adequate ventilation. Open doors and windows or use other means to ensure a fresh air supply during use and while product is drying. Vapors are heavier than air and can accumulate in low areas. If you experience any symptoms listed on this label, increase ventilation or leave the area. Product may pose an aspiration hazard if swallowed. This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm. **SPECIAL USAGE WARNINGS:** Contents Extremely Flammable. Do not smoke while spraying. Extinguish all flames, pilot lights, and heaters. Do not use on energized equipment. Vapors will accumulate readily and may ignite. Use only with adequate ventilation; maintain ventilation during use and until vapors are gone. **FIRST AID:** In case of eye or skin contact, flush with water for 15 minutes. If swallowed, DO NOT induce vomiting. If too much is breathed, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. For severe overexposure, call a physician immediately. For additional information, consult the Material Safety Data Sheet for this product. **DISPOSAL:** All used and unused product should be disposed of in conformance with local, state and federal regulations. Do NOT dump in sewers, floor drains, on the ground or into any body of water. **KEEP AWAY FROM CHILDREN**

**ELECTRICAL SHOCK HAZARD:** This can will conduct electricity. Keep away from all live electrical sources including battery terminals, solenoids, electrical panels and other electronic components. DO NOT use with ignition in "ON" position. Failure to observe this warning may result in serious injury from flash fire and/or electrical shock.



# Fuel Injection & Air Intake Cleaner

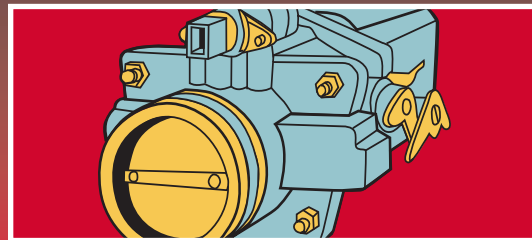

- Eliminates Hesitation and Rough Idle
- Removes Harmful Deposits
- Improves MPG
- Dries Fast

No. 1075 (CCM) • Net Wt. 12 oz. (340 g)

**DANGER:** EXTREMELY FLAMMABLE. VAPORS MAY CAUSE FLASH FIRES. HARMFUL OR FATAL IF SWALLOWED. EYE AND SKIN IRRITANT. CONTENTS UNDER PRESSURE. READ WARNINGS ON BACK PANEL.

