


SEARS

59205

BATTERY TERMINAL PROTECTION SPRAY

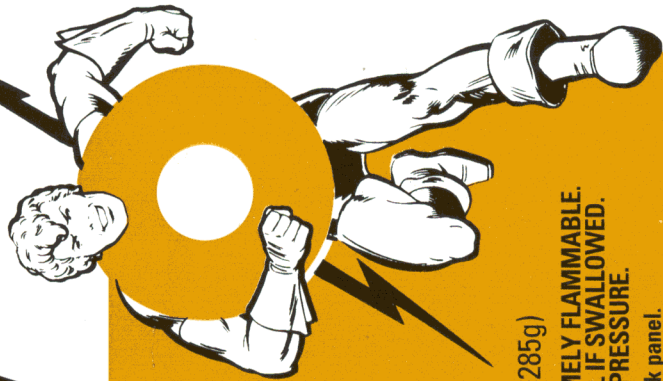

**lead free
fights
battery
corrosion
prolongs
battery life**

NET WT. - 10 oz. (285g)

**DANGER: EXTREMELY FLAMMABLE.
HARMFUL OR FATAL IF SWALLOWED.
CONTENTS UNDER PRESSURE.**

Read warnings on back panel.

WARNING

Contains: Isohexane 107-83-5, n-Hexane 110-54-3, Xylene 1330-20-7, Petrolatum 8009-03-8, Petroleum Distillate 8052-41-3, Petroleum Distillate 64742-47-8, Isobutane 75-28-5, and Propane 74-98-6.

This product is extremely flammable and should be kept away from all sources of ignition. **DO NOT PUNCTURE, INCINERATE OR STORE ABOVE 120°F.** DO NOT place in direct sunlight or near other heat sources.

This product contains chemicals known to the State of California to cause cancer, birth defects and other reproductive harm.

KEEP AWAY FROM CHILDREN.

USE ONLY IN WELL VENTILATED AREA. AVOID BREATHING SPRAY MIST. Avoid contact with skin and eyes. Overexposure to vapor may cause irritation to eyes and the nose and throat and may also cause dizziness, headaches, drowsiness, anesthesia, and other central nervous system effects. Inhalation of the mist may cause irritation of the respiratory tract. Vapors are heavier than air and can collect in low areas.

If exposed, wash eyes or skin with water for 15 minutes. If ingested may be harmful or fatal. **DO NOT INDUCE VOMITING.** If too much is breathed, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. For severe overexposure, CALL A DOCTOR IMMEDIATELY.

Electrical shock hazard: This can will conduct electricity. Do not touch can to live electrical sources including battery terminals, solenoids, electrical panels and other electronic components. Failure to observe this warning may result in serious injury from flash/fire or electrical shock. All used and unused product should be disposed of in conformance with local, state and federal regulations.

For additional information, consult M.S.D.S. for this product.

SPECIAL USAGE WARNINGS:

- Contents extremely flammable.
- Do not smoke while spraying.
- Extinguish all flames, pilot lights and heaters.
- Vapors will accumulate readily and may ignite.
- Use only with adequate ventilation; maintain ventilation during use and until vapors are gone.

INSTRUCTIONS

Read entire label before using this product.

1. SHAKE SPRAY CAN WELL.
2. Place terminal protectors over battery posts. Connect battery terminal cables.
3. Spray "Battery Terminal Protection Spray" on battery carrier, terminal cables, and battery posts. **OLDER BATTERIES:** Prepare surface by removing all corrosion, then follow instructions above.
4. For preventive maintenance, apply at least every 3-4 months.
5. When finished spraying, clean valve by turning can upside down and depressing actuator until only propellant escapes.

NOT FOR RETAIL SALE



MADE IN U.S.A. • Sold by Sears, Roebuck and Co., Hoffman Estates, IL 60179