

Protector 1500

WARNING: Contains Petroleum Distillate 8052-41-3, Hydrocarbon Resin, Alkyd Resin NA, Corrosion Inhibitor 57855-77-3 and Lanolin 8006-54-0. Progressively higher exposure to vapor may cause irritation to eyes and respiratory tract, headaches, dizziness, anesthesia, drowsiness, unconsciousness, and other central nervous system effects. Product is combustible and should be kept from all flames and other ignition sources. This product contains chemicals known to the State of California to cause cancer, birth defects and other reproductive harm. Deliberate misuse by concentrating and inhaling the contents can be harmful or fatal. Use only in a well ventilated area. Avoid continuous breathing of vapor and spray mist. Avoid contact with skin and eyes. Vapors are heavier than air and can collect in low areas.

FIRST AID: In case of eye or skin contact flush with water for 15 minutes. If swallowed do not induce vomiting. If too much is breathed, remove to fresh air. For severe overexposure, call a physician immediately.

HANDLING AND SPILL PRECAUTIONS: Keep container closed. Wash thoroughly after handling. Do not enter where vapors are suspected in high concentration unless air supplied positive pressure breathing apparatus is used and a trained observer is present and equipped with rescue gear. Vapors of this product may develop a flammable atmosphere. Keep away from flames, sparks, and ignition sources. Do not cut or weld containers due to explosion hazard. FOR SPILLS, use proper protective equipment. Take precautions as necessary to prevent contamination of ground or surface water. For small spills, use absorbent and sweep into closed containers for disposal. For large spills, evacuate the area, dike and transfer into containers for disposal.

DISPOSAL: Unused contents and containers must be disposed of in accordance with all federal, state, and local regulations. EMPTY containers may be offered to a qualified reconditioner. Unused contents may be offered to a licensed reclaimer. DO NOT DUMP IN SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER.

©1997 CRC Industries, Inc.
 Warminster, PA 18974
 800-521-3168 (Technical Info)
 800-272-4620 (Customer Service)
 Made in U.S.A. 97A CRC#480B



A V I A T I O N

Protector 1500

MEETS TESTS FOR BOEING BMS 3-29,
DOUGLAS DMS 2150
AND DOUGLAS DMS 2414, TYPE 2
MAXIMUM PROTECTION
DEEP PENETRATING ABILITY
RESISTS TEMPERATURE CHANGES,
SALT SPRAY AND CORROSION




Protector 1500

- Meets Boeing BMS 3-29, Douglas DMS 2150 and Douglas DMS 2414, Type 2
- Maximum Corrosion Protection for all common aerospace alloys; reapplication recommended once every 3 years
- Deep Penetrating Ability allows Protector 1500 to flow between faying surfaces and give maximum protection
- Heavy Film Coating resists temperature changes, humidity, salt-spray, galley fluids and other contaminants
- Easy Removability using CRC Super Degreaser
- Transparent Coating aids in corrosion detection without removal during inspections
- Fluorescent Dye allows for detectability when applied
- Can Be Diluted with petroleum solvents to assist in spraying, but film thickness should be controlled at 0.75-1.0 mils dry film for optimum protection
- Minimal Odor

DIRECTIONS: Read entire label before using this product. Protector 1500 can be applied by spray, brush or in a dip tank. The dip tank should be covered to prevent evaporation. Spray in even coats to ensure maximum protection on internal surfaces. Allow film to dry thoroughly. Additional coat may be needed in areas subject to greater exposure to contaminants. Do not apply while equipment is energized.

5 gal. (18.9 L)
 No. 10752

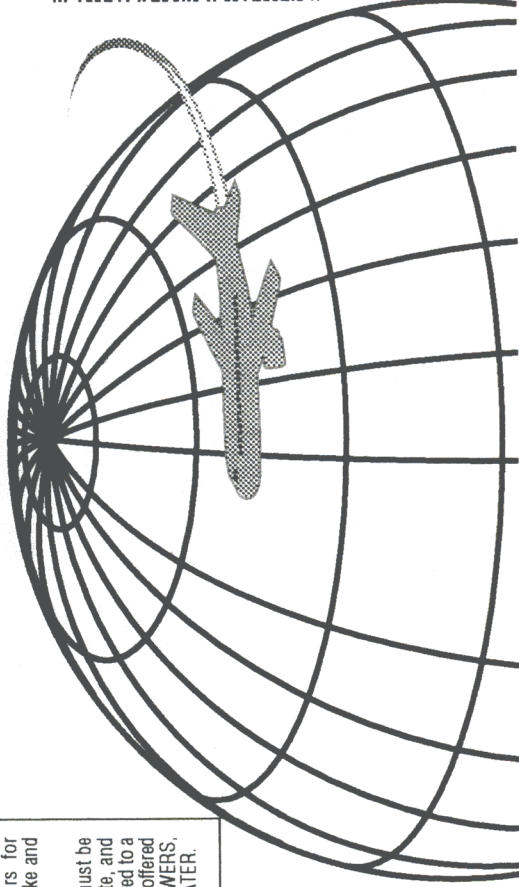

DANGER: COMBUSTIBLE. HARMFUL OR FATAL IF SWALLOWED. Read warnings on side panel.