


Read entire label before  
using this product.



# Hydraulic & Jack Oil

■ Anti-Foam

■ Anti-Rust

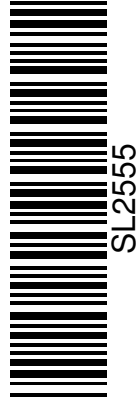

SL2555

**Part No. SL2555**

**NET CONTENTS: 36.6 lb / 16.7 kg**

Protects against rust, oxidation, corrosion and seal swell. Unique viscosity range allows use of one grade instead of two. Extends working life of hydraulic pumps and cylinders. Eliminates foaming and provides uniform hydraulics from 0°F to 150°F.

**NOT FOR USE IN HYDRAULIC BRAKES**

**ISO Viscosity Grade  
46 to 68  
SAE Grade 20**



HAZARDOUS MATERIAL IDENTIFICATION SYSTEM

HEALTH	1	REACTIVITY	0
FLAMMABILITY	1	PERSONAL PROTECTION	B

HAZARD: MINIMAL=0 SEVERE=4

#### PRECAUTIONARY STATEMENTS

Use with adequate ventilation. Open doors and windows or use other means to ensure a fresh air supply during use. Observe good industrial hygiene practices. Store away from incompatible materials. Do not store container above 100 °F. Dispose of waste and residues in accordance with local authority requirements.

#### FIRST AID

Wash hands after handling.

Deliberate misuse by concentrating and inhaling the contents is illegal and can be harmful or fatal. Inhalation abuse can cause death. For additional information, consult SDS for this product.

- Use in hydraulic systems & fluid drive units
- Safeguards against rust, oxidation & corrosion
- Compatible with all hydraulic fluids
- Helps protect all parts in hydraulic systems including seals
- Smooths hydraulic operations

Contains Hydrotreated heavy paraffinic distillates (64742-54-7) and Solvent-refined heavy naphthenic distillates (64741-96-4).

©2015 CRC Industries, Inc.

885 Louis Dr.

Warminster, PA 18974

800-521-3168 (Technical information)

800-272-8963 (Customer Care)

215-442-6260 (SDS)

www.crcindustries.com

15A Made in U.S.A.

FOR EMERGENCIES CALL CHEMTREC

1-800-424-9300

DATE

CODE:

